


SPLITTER UNIT 425

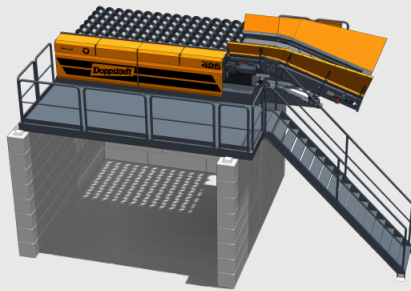

DIMENSIONS

| | |
|-----------------------|--------|
| Chassis | Static |
| Total weight (kg) | 6700 |
| Length (mm) | 7600 |
| Width (mm) | 2900 |
| Height (mm) | 1500 |
| Transport width (mm) | 2900 |
| Transport height (mm) | 1500 |
| Transport length (mm) | 7600 |

DRIVE

| | |
|-----------------------|-------------|
| Engine type | electric |
| Marke | Gearmotors |
| Motor power (kW / PS) | 16,5 / 22,4 |

LOWER SCREENING DECK

| | |
|-------------|------|
| Length (mm) | 4000 |
| Width (mm) | 2500 |

Applications

Like all machines belonging to this DOPPSTADT series the stationary SPLITTER UNIT can easily cope with a variety of materials. It is perfectly suited for commercial and industrial waste, wood, and green waste. For special applications the machine can be adapted to process scrap metal and slag as well.



Advantages

- Separation of less readily screenable material, including adjustment of screen gap
- Almost clog-free operation thanks to self-cleaning process
- Low maintenance costs due to robust, simple set-up
- Quick and easy exchange of screening deck modules serving a variety of applications
- Screening deck available in different lengths: 3,000, 4,000 and 6,000 mm